

密閉式 仕様表

標準

PE-RJ 37-32-27℃
1冷却トン=4.535kW (3.900kcal/h)

PEA-RJ 37.5-32-27℃
1冷却トン=6.532kW (5.610kcal/h)

低騒音型

ターボ式冷凍機用		二重効用吸収式冷凍機用		外形寸法				質量		送風機 (電源 3相 200V)			
37℃		37.5℃		L	W	H	h	製品	運転	ファン径D	定格出力	定格電流 (50/60Hz)	極数
32℃		32℃											
外気湿球温度 27℃		27℃											
型 式	標準水量m³/h	型 式	標準水量m³/h	mm	mm	mm	mm	kg	kg	mm	kW×台	A	P
30PE	23.4	20PEA	21.0	2,760	2,240	2,155	560	920	1,800	★KG-80JT	1.1×1	4.6/6.2	6
40PE	31.2	27PEA	28.0	2,760	2,240	2,785	560	1,000	1,980	★KG-80HT	2.2×1	9.0/11.0	6
50PE	39.0	35PEA	36.0	3,240	2,040	2,155	630	1,240	2,420	1,600	2.2×1	10.4/9.4	6
60PE	46.8	42PEA	43.0	3,240	2,040	2,155	630	1,240	2,420	1,600	2.2×1	10.4/9.4	6
80PE	62.4	55PEA	57.0	3,440	2,340	2,155	630	1,340	2,740	1,800	3.7×1	15.4/14.4	4
100PE	78.0	70PEA	72.0	3,240	1,840	2,785	1,080	1,440	2,720	1,600	5.5×1	22.6/20.8	4
125PE	97.5	90PEA	90.0	3,440	2,240	2,785	1,080	1,600	3,230	1,800	7.5×1	28.6/28.0	4
150PE	117.0	105PEA	108.0	3,240	4,080	2,155	630	2,440	4,800	1,600	3.7×2	15.4/14.4	4
175PE	136.5	125PEA	126.0	3,240	3,680	2,785	1,080	2,805	5,365	1,600	3.7×2	15.4/14.4	4
200PE	156.0	140PEA	144.0	3,240	3,680	2,785	1,080	2,805	5,365	1,600	5.5×2	22.6/20.8	4
225PE	175.5	160PEA	162.0	3,440	4,080	2,785	1,080	2,985	5,905	1,800	5.5×2	22.6/20.8	4
250PE	195.0	175PEA	180.0	3,440	4,480	2,785	1,080	3,125	6,385	1,800	7.5×2	28.6/28.0	4
300PE	234.0	215PEA	216.0	3,240	5,520	2,785	1,080	4,170	8,010	1,600	5.5×3	22.6/20.8	4
350PE	273.0	250PEA	252.0	3,440	6,120	2,785	1,080	4,440	8,820	1,800	7.5×3	28.6/28.0	4
400PE	312.0	285PEA	288.0	3,240	7,360	2,785	1,080	5,535	10,655	1,600	5.5×4	22.6/20.8	4
450PE	351.0	320PEA	324.0	3,240	8,160	2,785	1,080	5,815	11,535	1,600	5.5×4	22.6/20.8	4
500PE	390.0	355PEA	360.0	3,440	8,960	2,785	1,080	6,165	12,685	1,800	7.5×4	28.6/28.0	4
600PE	468.0	430PEA	433.0	3,440	11,200	2,785	1,080	7,690	15,840	1,800	5.5×5	22.6/20.8	4

★印の送風機は直結ファン仕様です。ファン径は800mmです。

PQ-RJ 37-32-27℃
1冷却トン=4.535kW (3.900kcal/h)


PQA-RJ 37.5-32-27℃
1冷却トン=6.532kW (5.610kcal/h)

ターボ式冷凍機用		二重効用吸収式冷凍機用		外形寸法				質量		送風機 (電源 3相 200V)			
入口水温	37℃	37.5℃		L	W	H	h	製品	運転	ファン径D	定格出力	定格電流 (50/60Hz)	極 数
出口水温	32℃	32℃											
外気湿球温度	27℃	27℃											
型 式	標準水量 [※] /h	型 式	標準水量 [※] /h	mm	mm	mm	mm	kg	kg	mm	kW×台	A	P
30PQ	23.4	20PQA	21.0	2,760	2,240	2,155	560	960	1,840	*QH-80JT	1.1×2	5.2/5.6	8
40PQ	31.2	27PQA	28.0	2,760	2,240	2,155	560	960	1,840	*QH-80JT	1.1×2	5.2/5.6	8
50PQ	39.0	35PQA	36.0	3,240	2,040	2,155	630	1,240	2,420	1,600	2.2×1	10.4/9.4	6
60PQ	46.8	42PQA	43.0	3,240	2,040	2,155	630	1,240	2,420	1,600	2.2×1	10.4/9.4	6
80PQ	62.4	55PQA	57.0	3,440	2,340	2,155	630	1,340	2,740	1,800	3.7×1	15.4/14.4	4
100PQ	78.0	70PQA	72.0	3,240	2,040	2,785	1,080	1,510	2,940	1,600	5.5×1	22.6/20.8	4
125PQ	97.5	90PQA	90.0	3,240	3,680	2,155	630	2,340	4,440	1,600	3.7×2	15.4/14.4	4
150PQ	117.0	105PQA	108.0	3,240	3,680	2,785	1,080	2,805	5,365	1,600	2.2×2	10.4/9.4	6
175PQ	136.5	125PQA	126.0	3,240	3,680	2,785	1,080	2,805	5,365	1,600	3.7×2	15.4/14.4	4
200PQ	156.0	140PQA	144.0	3,240	4,080	2,785	1,080	2,945	5,805	1,600	5.5×2	22.6/20.8	4
225PQ	175.5	160PQA	162.0	3,440	4,680	2,785	1,080	3,185	6,565	1,800	5.5×2	22.6/20.8	4
250PQ	195.0	175PQA	180.0	3,440	4,680	2,785	1,080	3,185	6,565	1,800	7.5×2	28.6/28.0	4
300PQ	234.0	215PQA	216.0	3,240	6,120	2,785	1,080	4,380	8,670	1,600	5.5×3	22.6/20.8	4
350PQ	273.0	250PQA	252.0	3,440	7,020	2,785	1,080	4,730	9,800	1,800	5.5×3	22.6/20.8	4
400PQ	312.0	285PQA	288.0	3,240	8,160	2,785	1,080	5,815	11,535	1,600	5.5×4	22.6/20.8	4
450PQ	351.0	320PQA	324.0	3,440	8,960	2,785	1,080	6,165	12,685	1,800	5.5×4	22.6/20.8	4
500PQ	390.0	355PQA	360.0	3,440	9,360	2,785	1,080	6,285	13,045	1,800	7.5×4	28.6/28.0	4
600PQ	468.0	430PQA	433.0	3,440	11,700	2,785	1,080	7,830	16,280	1,800	5.5×5	22.6/20.8	4


超 低 騒 音 型

★印の送風機は直結ファン仕様です。ファン径は800mmです。

標準・1セルの場合

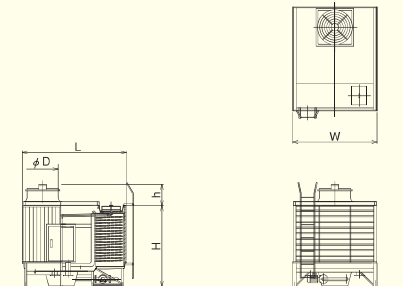

標準・複数セルの場合

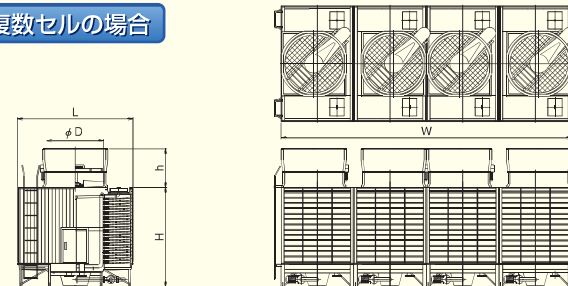

●運転音は周囲の環境、気象条件により多少異なります。 ●アンカーボルトは付属していません。